

Technical Bulletin

Model
911C2/C4

Group
8

Subject: Heater Fan Motor, Securing

Part Identifier
8530

Number
9001

ATTENTION: Service Manager/Service Technician

Models Affected: *911 Carrera 2 and 911 Carrera 4 Model Year 1990 (L)*

Concern: Additional securing of heater fan motors.

Repair Information: The heater fan motors are secured with two plastic screws each, in addition to the locking tabs, from production date October 1989. When removing the fan motors, the screws must be removed before disengaging the locking tabs. The screws can be accessed through openings in the blower wheel (arrows in Figure 1). Reinstall both screws after repairs. Refer to 911 Carrera 2/4 Workshop Manual Volume VI, page 87-13 thru 87-15 for heater fan motor removal and installation procedures.

Fan motors with the additional securing screws can be identified by a white paint dot in the area of the manufacturers identification plate (arrow in Figure 2).

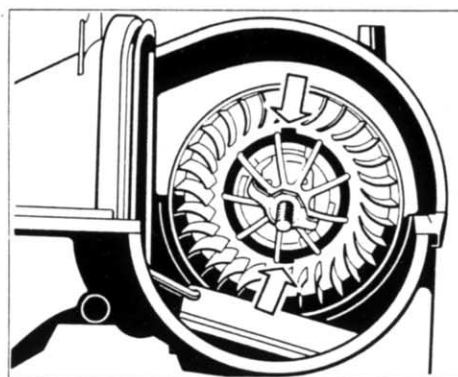


Figure 1

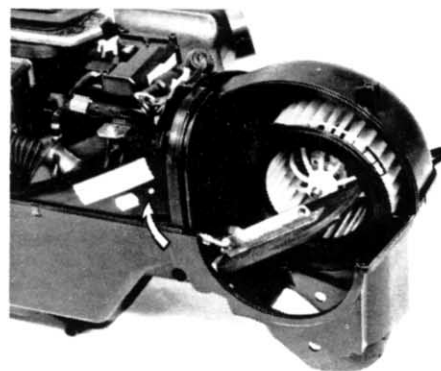


Figure 2

Dealership Distribution Routing	Service manager	_____	Shop foreman	_____	Service technician	_____	_____	_____	_____
	Asst. manager	_____	Warranty admin.	_____	Service technician	_____	_____	_____	_____

©1990 Porsche Cars
North America, Inc.
All Rights Reserved
Technical Support
Department

SERVICE

Page 1 of 1
May 29, 1990